

Low Temp Soft Heat® Server



Features

Low Temp Soft Heat Server

- Temperature is set to 163.4°F (73°C).
- 1.5 gallon (5.7L) Soft Heat servers supply controlled heat to maintain temperature.
- Safety-Fresh® patented brew-through lid with vapor seal and spill prevention.
- LED power indicator shows server is operational.

Soft Heat Server Stands

- Remote one and two server docking stations for additional satellite serving.
- Docking stations have instant power contact with servers.
- International electrical configurations available.

5.7L Low Temp SH Server

Dimensions: 16.6" H x 8.5" W x 14" D
(42.2cm H x 25.4cm W x 35.6cm D)

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products



1SH Stand

Dimensions: 11.6" H x 10.1" W x 13.2" D
(29.5cm H x 25.7cm W x 33.5cm D)

Product No. : 27825.0000 (120V)
27825.0001 (230V, 70 watts)
27825.0002 (230V, 80 watts)




2SH Stand

Dimensions: 11.6" H x 18.7" W x 13.2" D
(29.5cm H x 47.5cm W x 33.5cm D)

Product No. : 27875.0000 (120V)
27875.0001 (230V, 140 watts)
27875.0002 (230V, 160 watts)


One Position Drip Tray

For use with Single/Single SH
Product No. : 26830.0000



Two Position Drip Tray




For use with Dual/Dual SH
Product No. : 27150.0000



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
SH Server	27850.0035	n/a	n/a	n/a	n/a	1½ gal. (5.7L)	17 lbs. (7.7 kg)	N/A	N/A
1SH Stand	27825.0000	120	0.8	n/a	90	Holds 1 SH Server	13 lbs. (5.9 kg)	Yes	UL LISTED
1SH Stand	27825.0001	230	0.35	n/a	75	Holds 1 SH Server	13 lbs. (5.9 kg)	Yes	CE
1SH Stand	27825.0002	230	0.35	n/a	75	Holds 1 SH Server	13 lbs. (5.9 kg)	Yes UK Plug	CE
2SH Stand	27875.0000	120	1.5	n/a	180	Holds 2 SH Servers	22 lbs. (10.0 kg)	Yes	UL LISTED
2SH Stand	27875.0001	230	0.7	n/a	150	Holds 2 SH Servers	22 lbs. (10.0 kg)	Yes	CE
2SH Stand	27875.0002	230	0.7	n/a	150	Holds 2 SH Servers	22 lbs. (10.0 kg)	Yes UK Plug	CE

Electrical: 120V models require 2-wires plus ground service rated 120V, single phase, 60Hz.
230V models require 2-wires plus ground service rated 220-240V, single phase, 50/60 Hz.

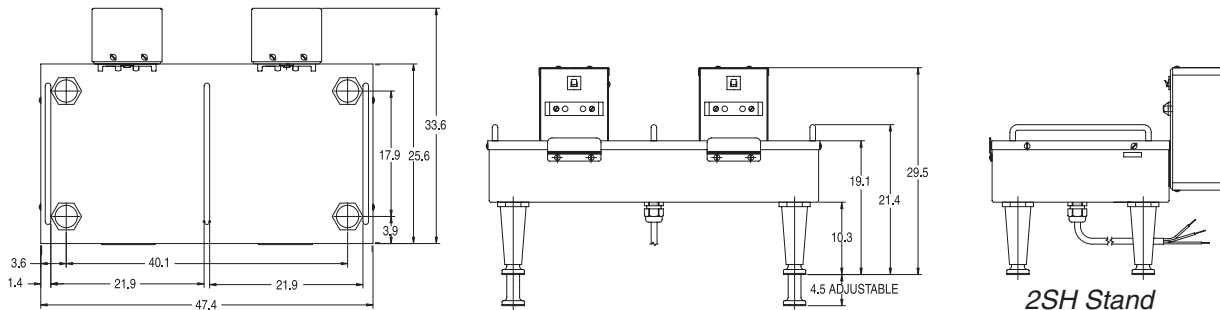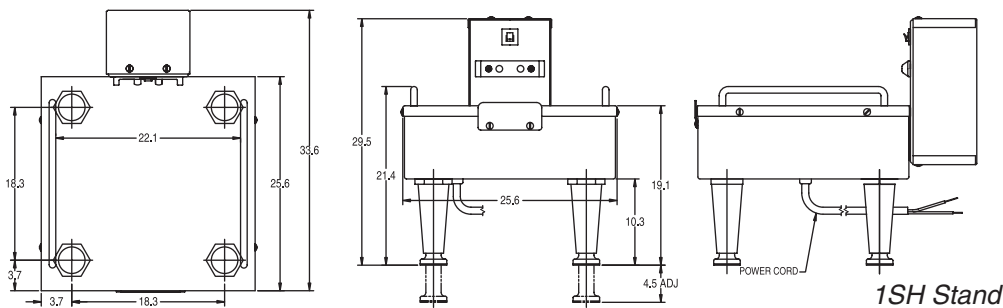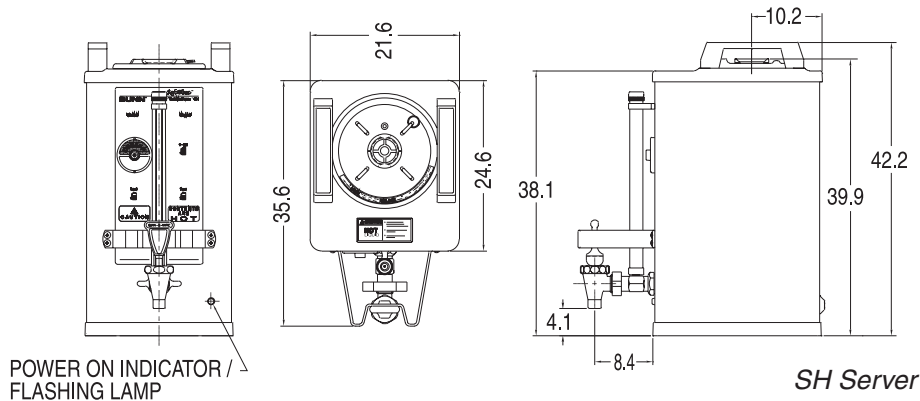

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

9/09 © Bunn-O-Matic Corporation